

Single-probe wireless communication measurement system

- Applied to communication, IC design and electromagnetic field of study & research.
- Best tool for phone, location-based service, antenna, handhelds and system development.
- Applicable for teaching, research, product development and production quality validation and verification.





Persistence X Eternal

18 We are already here.

Atenlab X Measurement Expert


With over 18 years of experience, Atenlab has developed wealth of experiences , high quality, and flexible equipment services.


To localize globe trade, Atenlab strives to provide real-time support 24/7. To make it possible, Atenlab follows a strict review procedure and training courses to help local agent serves every customers well, and ensure every problem is taken care of instantly. That is why Atenlab is not just an industry expert, but a reliable partner good at dealing with unexpected issues and risks.



Origin X 2004

Atenlab focuses on increasing the productivity of antenna, measurement systems and RF equipment. High-efficiency, cost-effective and high-functionality is what makes we are the best partner when it comes to product.

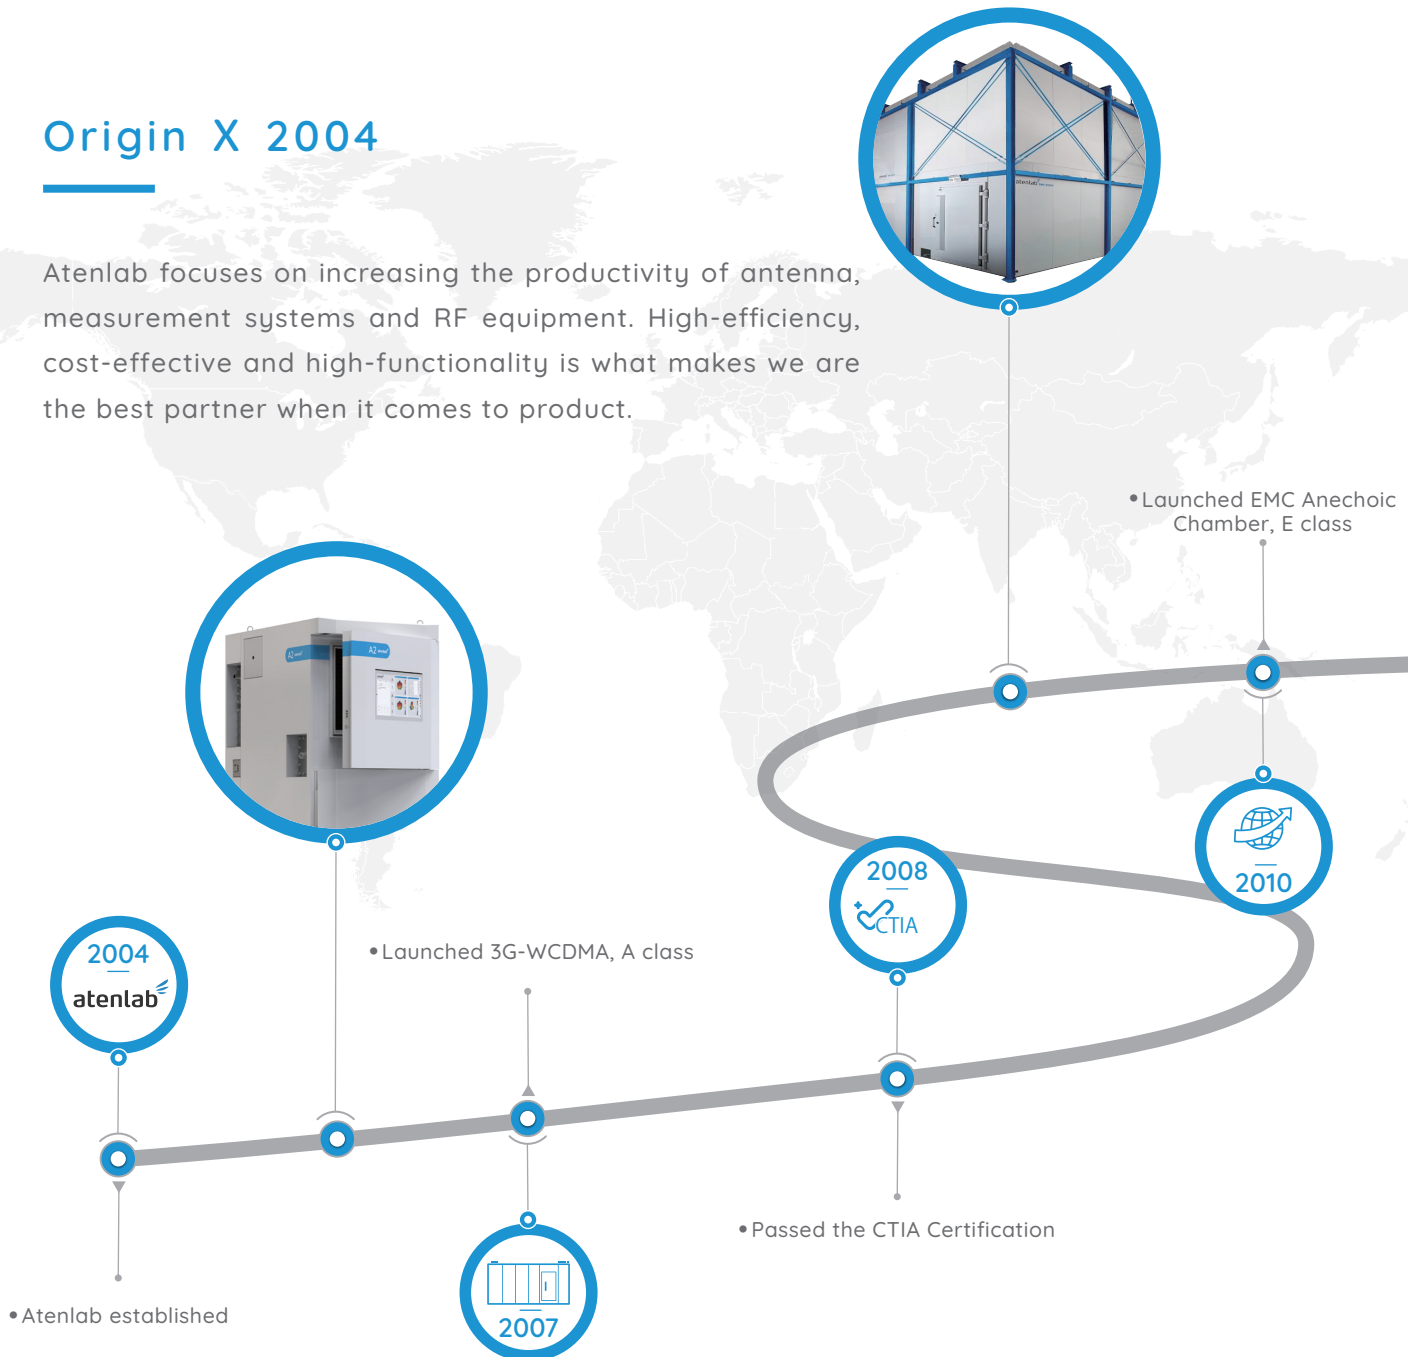

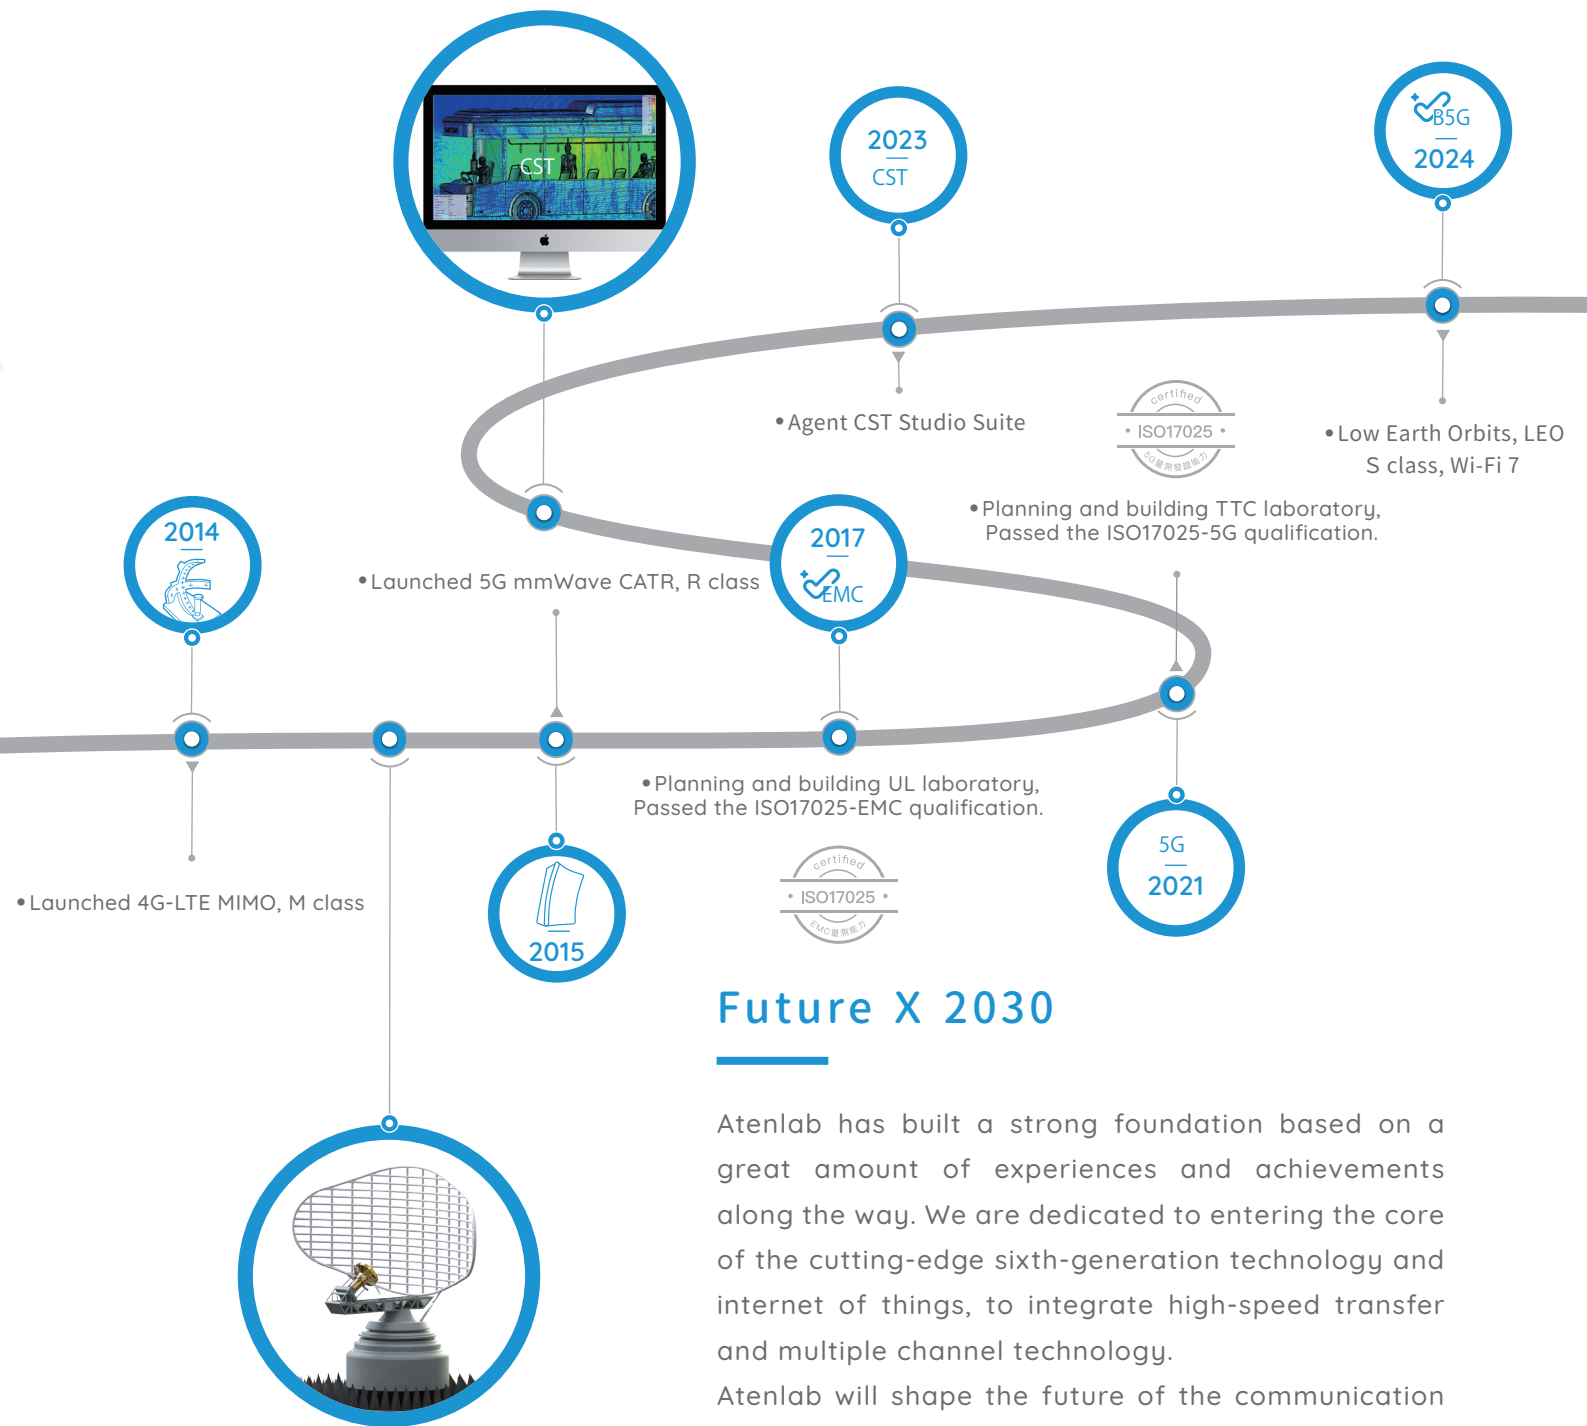

Future X 2030

Atenlab has built a strong foundation based on a great amount of experiences and achievements along the way. We are dedicated to entering the core of the cutting-edge sixth-generation technology and internet of things, to integrate high-speed transfer and multiple channel technology. Atenlab will shape the future of the communication industry as the way it should be.



Atenlab X The Measurement Foundation

Measurement system is an applied science, there is no best, only better. It firmly associates to the fundamental.


Single-Probe X Communication

A typical single-probe communication system is a single-variable control system with only one input and output (single-input single-output: SISO). This setup is the simplest, lowest-cost, most stable and also most mature technical solution. SISO is the mainstream architecture and is used by 50% of the communication system.

Two major variables in determining the performance of the communication system: passive and active measurement. Passive measurement only measures the performance and feature of the antenna-under-test (AUT). Active measurement links the AUT which is connected to its communication system to measure the performance of the complete communication system. Active measurement measures the radiated power (Tx) and receiving sensitivity (Rx). This measurement can help analyze problems such as power component or noise interference in the system.

A class is a stable, mature and highly-effective measurement tool and popular amongst engineers.

Near-field X Far-field

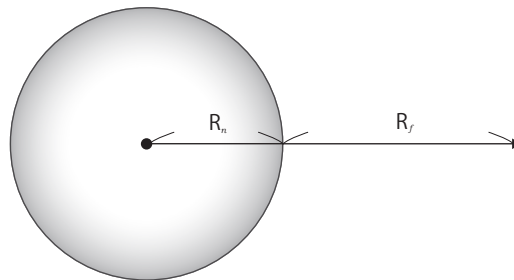

$$R_f > \frac{2D^2}{\lambda} > R_n$$

R_n : Near-field
 R_f : Far-field
 λ : Wavelength
 D : Antenna Size


There are two types of the antenna radiation pattern: Near-field and Far-field. For a long time, there is no established standard to estimate the difference between the two of them. But the key factor to tell the difference is to determine if the EM wave is in planar form.

If it is plane wave then it would be Far-field, otherwise, Near-field.

The physical meaning of a plan wave is that the phase of the wave fronts is the same, which means the arrival time of the wave fronts is the same. which is the measurement range of the far field. A non-spherical wave can be referred to as a spherical wave, with different arrival times of the wavefront. This range has a larger air loss and is the measurement range of the near field.


Calibration X Quality

According to CTIA, this is the standardized antenna comparison method. The measurement data of the DUT is obtained by comparing it with a standard antenna, and the measurement accuracy is based on the standard antenna. Therefore, placing the standard antenna in the system and performing path loss calibration is the core definition of the measurement method.

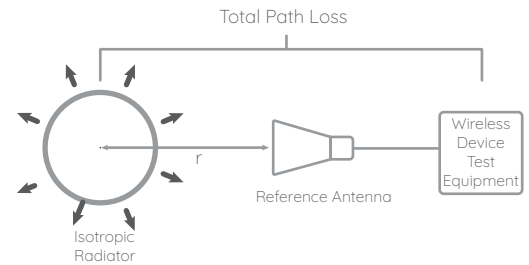

Calibration X Quiet Zone

The quiet zone is an imaginary space. The measurement method would be to collect the data on the border of the quiet zone, once the data is captured and organized, the quality of the quiet zone can be verified.

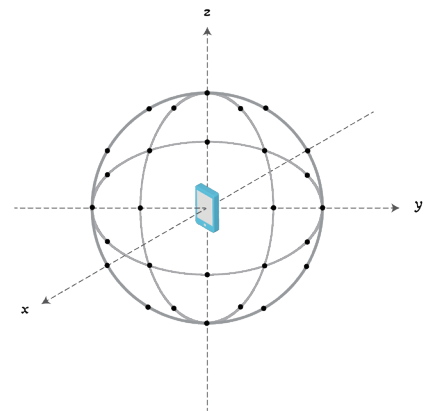

Passive X Measurement

Antenna Gain

Antenna gain is considered as an index of radiating or receiving capability, the unit is in dBi. Measuring the gain of a single antenna from different directions can create an antenna pattern, which, after calculating and analyzing the data, can be visualized to provide the antenna designer with the correct research direction.

dBi vs dBd

dBi and dBd is about the value of gains (power gains), both are relative values, but the reference is different. The reference of dBi is omnidirectional antenna, dBd's reference is dipole. Generally speaking, if both gains are the same, the dBi value is 2.15 times bigger than dBd.


High Frequency X Development

TRP (Total Radiated Power)


Total radiated power is an important parameter in the measurement system, used to represent the total output power of the test object. When the test object is a terminal device, a connection is established between the simulated base station and the terminal to maintain communication. The power value of the test object is taken from different directions, and the calculation and analysis result is TRP.

TIS (Total Isotropic Sensitivity)

Omnidirectional sensitivity refers to the sensitivity performance of the test object in all directions. It represents the object's sensitivity to external stimuli and indicates the object's sensitivity to its surroundings. The measurement method is similar to TRP, but the power value is changed to sensitivity measurement, and the calculation analysis result is TIS. When sensitivity measurement takes more time, the communication power must be gradually reduced until the power value that affects the communication quality of the test object is reached, which is sensitivity.

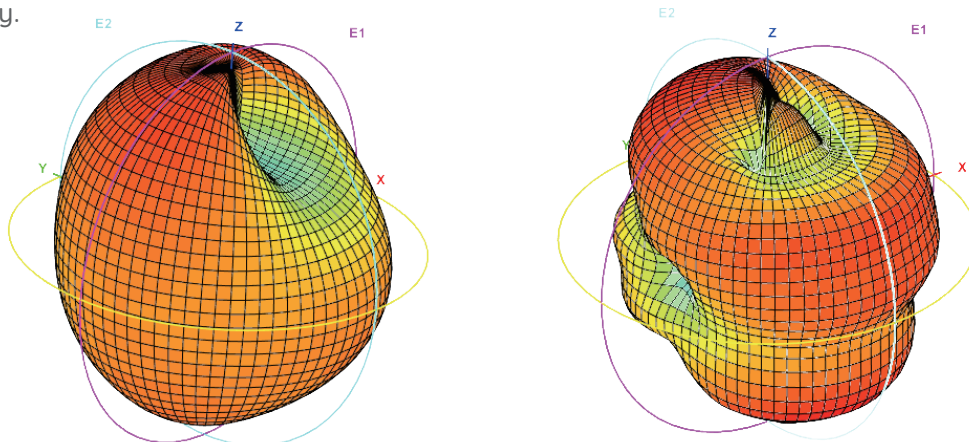

Single Probe X System Architecture

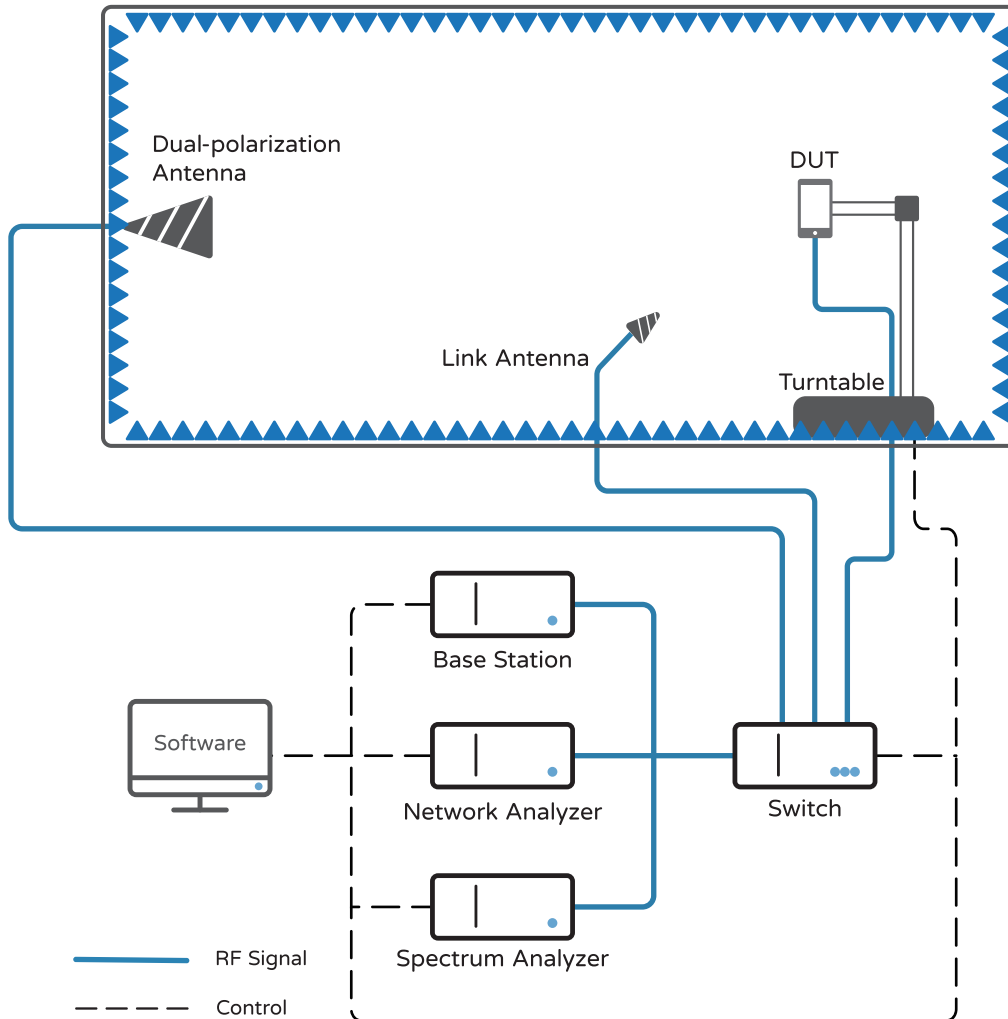

Atenlab X Maxwell

Maxwell's equations were developed by a Scottish-born scientist, are a set of partial differential equations of electric field, magnetic field, electric density and current density.


Atenlab integrates all the electromagnetic measurement technology and methods and has successfully sold hundreds of systems since 2004. Atenlab has thousands of active users in the mobile communication and Wi-Fi field. Atenlab's Maxwell family includes MWT, MW5 and MWC, and MWK for calibration and MWV for viewing. They are also constantly upgraded.

Maxwell X Software

MWV

Maxwell Viewer provides the log-in system, monitor data in real-time with multiple infographics, and produces test report based on particular needs. It's Easy to use and also supports many specifications.


- 2D/ 3D visualization report to show measurement results.
- Varied data analysis and cross-comparison picture.
- Customized standard report.
- Support major magnetic simulation's data.

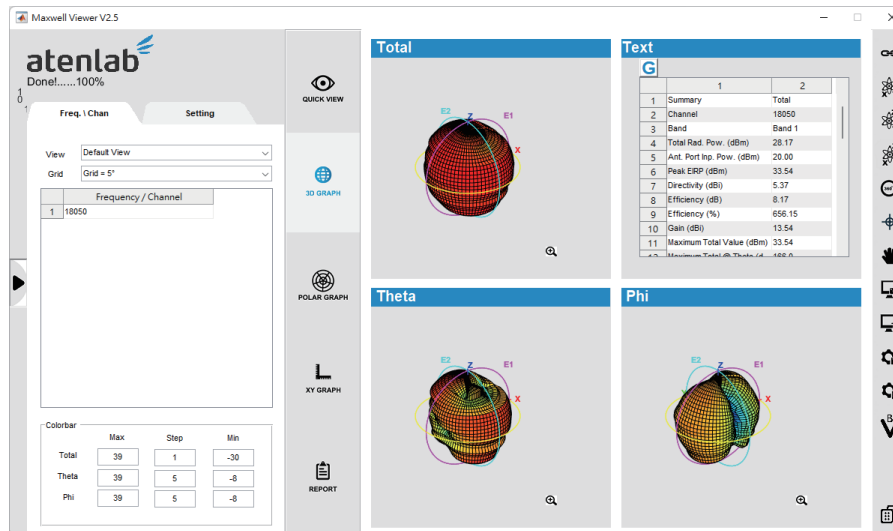

MW5

The most advanced OTA measurement software. Shipped with the core technology from 2G to 5G, assembled the world-renowned manufacturing firm's control command, and backed by countless user feedback, MW5 is stable and mature.


- Support GSM, CDMA, W-CDMA, TD-SCDMA, LTE, 5G FR1, FR2
- UWB, GPS, A-GPS, Bluetooth, Wi-Fi a/b/g/n/ac/ax/be
- Free-trial/ Remotely maintain and upgrade.

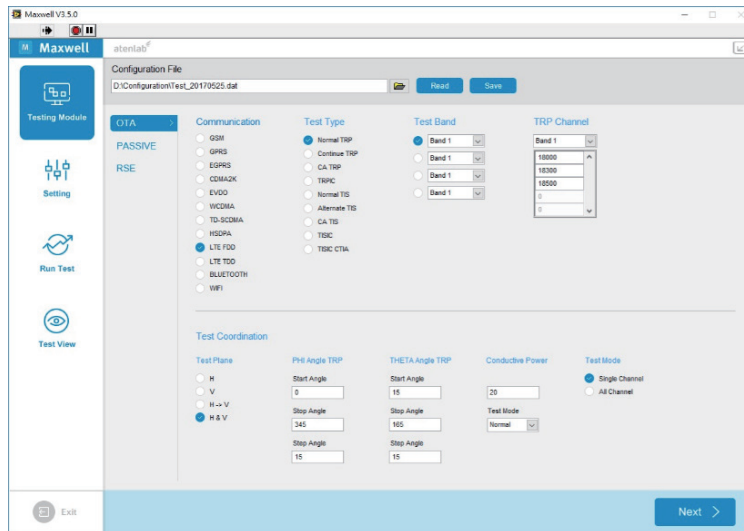

MWT

Introducing a new member from the Maxwell family, Maxwell Throughput. Atenlab provides a specific measurement plan for high-speed data and multi-channel architecture, adding new performance measurement solutions to help developers break through existing challenges.

- Supports IxChariot/ Iperf3 and chip manufacturer's core of algorithm.
- Customized schedules, test items, test walkways, comply with TR 398.
- Exclusive AP brings you a more efficient measurement process.

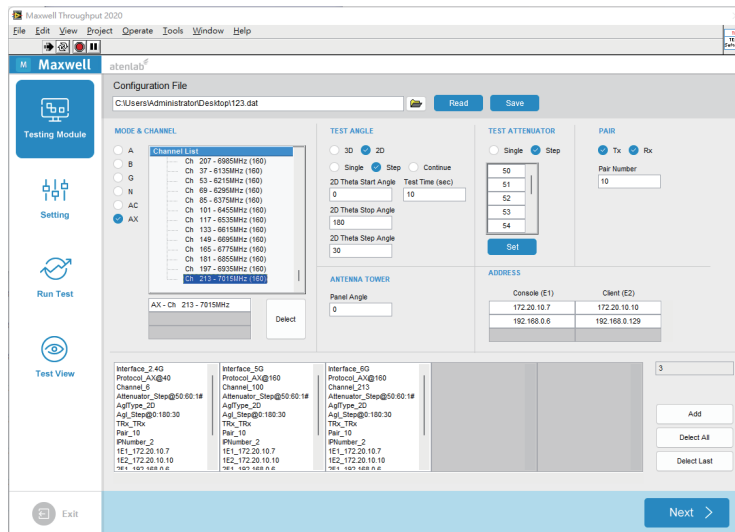

Atenlab X Selection

As soon as you choose A class, please spend more time on learning every detail of the A class. This will be the most important decision you've ever made.

Based on the wealth of user experiences, Atenlab provides multiple practical advice. Hope you spend more time to considering this decision in case you regret in the near future.

A class X Specification Comparison

| | A2 | A3 |
|----------------------------|---------------------|-------------------------------|
| Operating Frequency | 0.68 – 8 GHz | 0.65 – 8.5 GHz |
| Upgrade Frequency | 2.0 - 18 GHz | 0.65 – 13 GHz 2.0 – 18 GHz |
| Maximum Tested Object | 7"Handheld Device | 13"Tablet Device |
| Turntable PHI Load | 2 Kg | 8 Kg |
| Measurement Distance | 0.9 m | 2.1 m |
| Quiet Zone Size | N/A | 30 cm |
| Quiet Zone Characteristics | N/A | 0.3m SD < 1.0 |
| Shielding Effectiveness | 0.5-18 GHz > 100 dB | 0.03-18 GHz > 100 dB |
| Software | MWV / MW5 | MWV / MW5 / MWT |

| | A6 | A8 |
|----------------------------|-------------------------------|---|
| Operating Frequency | 0.65 – 8.5 GHz | 0.45 – 6 GHz |
| Upgrade Frequency | 0.65 - 13 GHz 2.0 – 18 GHz | 0.65 – 8 GHz 0.65 – 13 GHz 2.0 – 18 GHz |
| Maximum Tested Object | 19" Laptop | 19" Laptop |
| Turntable PHI Load | 15 Kg | 15 Kg |
| Measurement Distance | 4 m | 5 m |
| Quiet Zone Size | 50 cm | 60 cm |
| Quiet Zone Characteristics | SD < 0.8 | SD < 0.8 |
| Shielding Effectiveness | 0.03 - 18 GHz > 100 dB | 0.03 - 18 GHz > 100 dB |
| Software | MWV / MW5 / MWT | MWV / MW5 / MWT |

A class X Size

| | A2 | A3 |
|-------------------------------|--------------------|-------------------|
| Maximum Tested Object | 7" Handheld Device | 13" Tablet Device |
| Outside Dimension(L/W/H) | 1.2 x 0.8 x 1.9 m | 3.5 x 1.7 x 2.4 m |
| Shielding Door Dimension(W/H) | 0.5 x 0.5 m | 1.0 x 1.0 m |
| Weight | < 350 Kg | < 2000 Kg |
| Working Dimension(L/W/H) | 2.0 x 1.0 x 2.0 m | 3.7 x 3.2 x 2.5 m |

| | A6 | A8 |
|-------------------------------|-------------------|-------------------|
| Maximum Tested Object | 19" Laptop | 19" Laptop |
| Outside Dimension(L/W/H) | 6.0 x 3.0 x 3.0 m | 8.2 x 4.1 x 4.1 m |
| Shielding Door Dimension(W/H) | 1.0 x 2.0 m | 1.0 x 2.0 m |
| Weight | < 4000 Kg | < 6500 Kg |
| Working Dimension(L/W/H) | 6.2 x 4.3 x 3.3 m | 8.4 x 5.4 x 4.4 m |



A2

A2 X Mobility

A2 is all about mobility. Transforming your perception on the definition of a laboratory.

Save 80% of space and requires no set up.

Think it as Plug and Play, simple as that.




A2 X Appearance

- Mobility
- Plug and Play
- Rapid Measurement



A2 X Three-View-Drawing

- Size: L1.2 x W0.8 x H1.9 m
- Weight: 350kg
- Built space: L2.0 x W1.0 x H2.0 m
- Floor-loading capacity: 250kg/m²

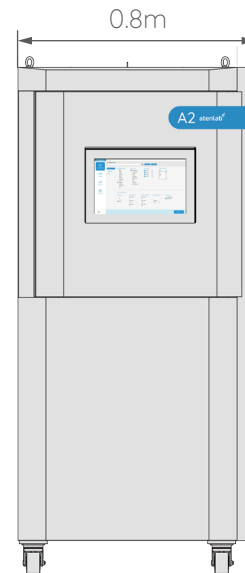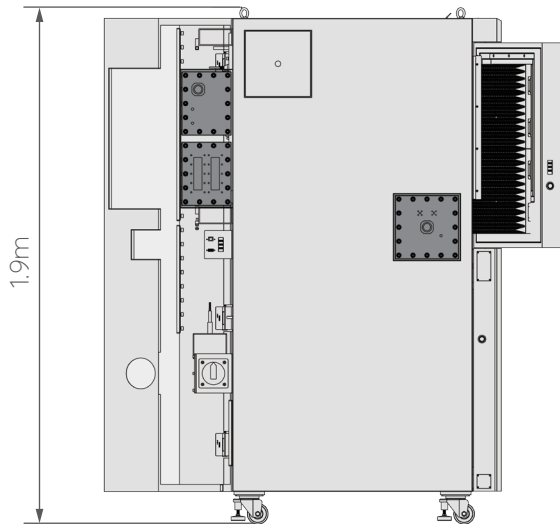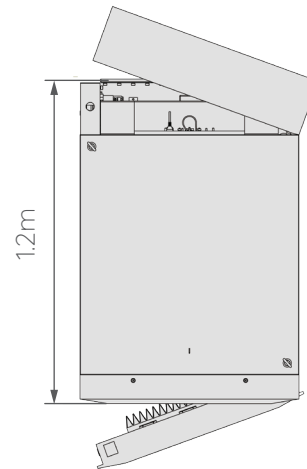

A2

A2 X Internal



A2 X Specifications

A2

| | |
|----------------------------|--|
| SISO System | A2 |
| Measurement Distance | 0.9m |
| Maximum Tested Object | 7.0” Handheld Device |
| Quiet Zone Size | N/A |
| Quiet Zone Characteristics | N/A |
| Operating Frequency | 0.68 - 8 GHz |
| Antenna Framework | Direct Far-Field |
| Number of Antennas | Single Probe |
| Passive Test Time | Ant. Eff. < 4min |
| TRP Test Time | TRP < 6 min / Ch. |
| TIS Test Time | TIS < 10 min / Ch. |
| Test Function | Antenna Performance / Receiver Sensitivity Transmit Power / Carrier Aggregation |
| Test Item | EIRP / EIS / TRP / TIS / Ant. Eff. / Antenna Pattern / Gain |
| Communication Protocol | 5G NR FR1 / LTE TDD / FDD / LTE Cat-M / NB-IoT / Bluetooth Wi-Fi 802.11a / b / g / n / ac / ax / be WCDMA / HSDPA / HSPA / HSPA+ / HSUPA TD-SCDMA / TD-HSDPA / GSM / GPRS / EDGE CDMA2000 / CDMA 1xRTT / CDMA 1xEVDO |
| System Stability | Ant. Eff. SD < 10% |
| Path Loss (Typical) | 47dB @ 3.8GHz 35dB @ 6.0GHz ,41dB @ 8.0GHz |

A2 X Hardware Specifications

| Anechoic Chamber | A2 |
|---------------------------------|---|
| Outside Dimension (L/W/H) | 1.2 x 0.8 x 1.9 m |
| Inside Dimension (L/W/H) | 0.8 x 0.7 x 1.7 m |
| Shielding Effectiveness | 0.03-18GHz > 100dB |
| Shielding Steel Sheet Thickness | SPPC Steel Pan Type By 2 mm Galvanized Steel Sheet |
| Shielding Door | Electirc Auto Latching |
| Shielding Door Dimension (W/H) | 0.5 x 0.56 m |
| Number of Shielding Door | 2 |
| Air Vent | N/A |
| Power Source Filter | 1P2W 100-280 VAC / 6A |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) |
| Lighting | N/A |
| Laser Line | 3 Laser Red Line |
| CCTV | N/A |
| Weight | 350 Kg |

Absorber

| | |
|------------------------------------|---|
| Material | Expandable Polypropylene |
| Power Density Susceptibility (V/m) | 750 V/m |
| Operating Temperature | -15 C to +60 C |
| Operating Humidity | 30% to 70% |
| ISO Dust-Free (Class) | Suited for Class 100,000 Clean Room |
| RoHS & REACH | RoHS & REACH Compliant |
| Fire-retardant Performance | NRL 8093 Test 1&3 / UL94 HBF / ISO 4589-2 |
| Waterproof Rating | IPX5 |

Communication Antenna

| | |
|------------------------|-----------------------|
| Operating Frequency | 0.68-8GHz |
| Antenna Gain | 6 dBi |
| Polarization | Single Polarization |
| Polarization Direction | Circular Polarization |
| Max. Watt | 4 Watt CW |
| Connector | SMA |

SISO Switching Box

| | |
|--------------------------|---|
| Passive DRE | 0.5 - 13 GHz with DRE |
| Wi-Fi / BT DRE Frequency | 0.5 - 8 GHz (Optional) |
| 5GNR FR1 DRE Frequency | 0.5 - 8 GHz (Optional) |
| Instrument Port Support | 3 Port |
| Test Item Support | Passive Cellular Tx / Rx (Optional) BT / Wi-Fi Tx / Rx (Optional) Communication Coexistence (Optional) Carrier Aggregation (Optional) |

Measurement Antenna

| | |
|------------------------|----------------------------------|
| Operating Frequency | 0.65 - 8.0 GHz |
| Polarization | Dual Linear Polarization Antenna |
| Polarization Isolation | 20dB |
| Antenna Gain | 6 dBi |
| Connector | SMA |

Positioner

| | |
|-------------------------|-------------------------|
| Theta Platform Diameter | 0.5m |
| Turtable PHI Load | 2.0Kg |
| Torque | Theta 9 N-m ,Phi 3 N-m |
| Turtable Type | 3D |
| Turtable Resolution | 0.1° |
| Turtable Accuracy | ±0.5° |
| Max. Turntable Speed | Theta 6 RPM ,Phi 12 RPM |
| Input Power | 220 VAC 50GHZ 500W |
| Phi Axis Removable | N/A |
| Standard Fixture | Flat Plate Fixture |
| Optional Fixture | Handheld Device Fixture |

Installation Requirement

| | |
|----------------------------------|-------------------|
| Working Dimension(L/W/H) | 2.0 x 1.0 x 2.0 m |
| Electrical | 220VAC 50Hz 16A |
| Regular Lead Time (Working Days) | 45 |
| Temporary Storage Spacing | N/A |

Control Unit

| | |
|------------------|------------------------------|
| CPU | Intel Core i5 |
| Operating System | Windows 10 Enterprise 64 bit |
| Hard Drive | 500G HDD |
| Ram | 8GB |
| Monitor | 15" |
| I/O Interface | GPIB |
| Instrument Rack | N/A |

A3 x Delicate

Designed for people who have limited space and budget.
A3 saves 50% of space while maintaining accurate measurement results.

The logo consists of the letters 'A3' in a bold, white, sans-serif font, centered within a white rounded rectangular shape. This shape is part of a larger graphic on the right side of the page, which includes several white, curved, leaf-like shapes pointing towards the left.




A3 X Appearance

- Compact
- Easy Set Up
- Multipurpose



A3 X Three-View-Drawing

- Size: L3.5 x W1.7 x H2.4 m
- Weight: 2,000kg
- Built space: L3.7 x W3.2 x H2.5 m
- Floor-loading capacity: 250kg/m²

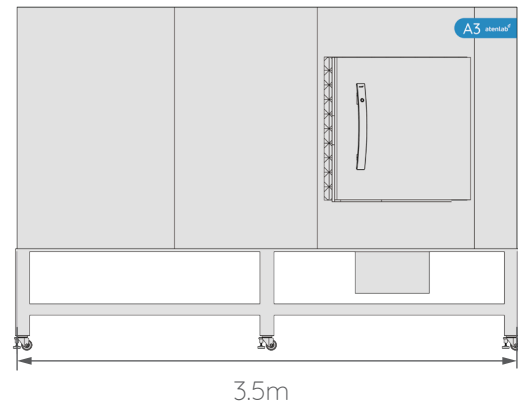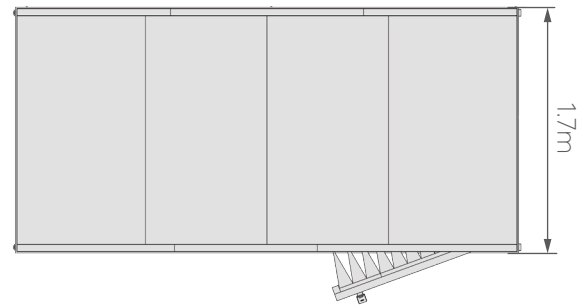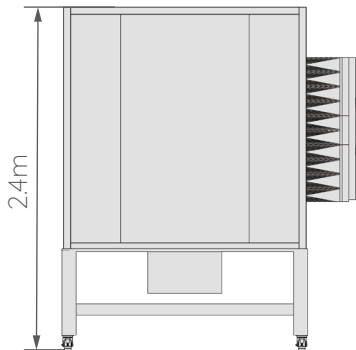

A3

A3 X Internal



A3 X Specifications

| SISO System | A3 |
|----------------------------|--|
| Measurement Distance | 2.1m |
| Maximum Tested Object | 13" Table Device |
| Quiet Zone Size | 0.3m |
| Quiet Zone Characteristics | SD < 1.0 |
| Operating Frequency | 0.65 - 8.5 GHz |
| Antenna Framework | Direct Far-Field |
| Number of Antennas | Single Probe |
| Passive Test Time | Ant. Eff. < 4min |
| TRP Test Time | TRP < 6 min / Ch. |
| TIS Test Time | TIS < 10 min / Ch. |
| Test Function | Antenna Performance / Receiver Sensitivity / Transmit Power Communication Coexistence / Carrier Aggregation |
| Test Item | EIRP / EIS / TRP / TIS / Ant. Eff. / Antenna Pattern / Gain |
| Communication Protocol | 5G NR FR1 / LTE TDD / FDD / LTE Cat-M / NB-IoT / Bluetooth Wi-Fi 802.11a / b / g / n / ac / ax / be WCDMA / HSDPA / HSPA / HSPA+ / HSUPA TD-SCDMA / TD-HSDPA / GSM / GPRS / EDGE CDMA2000 / CDMA 1xRTT / CDMA 1xEVDO |
| System Stability | Ant. Eff. SD < 10% TRP SD < 0.5dBm ; TIS SD < 1dBm |
| Path Loss (Typical) | 47dB @ 3.8GHz 35dB @ 6.0GHz ,41dB @ 8.0GHz |

A3

A3 X Hardware Specifications

| Anechoic Chamber | A3 |
|---------------------------------|---|
| Outside Dimension (L/W/H) | 3.5 x 1.7 x 2.4 m |
| Inside Dimension (L/W/H) | 3.4 x 1.6 x 1.6 m |
| Shielding Effectiveness | 0.03-18GHz > 100dB |
| Shielding Steel Sheet Thickness | SPCC Steel Pan Type By 2 mm Galvanized Steel Sheet |
| Shielding Door | Electric Auto Latching |
| Shielding Door Dimension (W/H) | 1.0 x 1.0 m |
| Number of Shielding Door | 1 |
| Air Vent | N/A |
| Power Source Filter | 1P2W 100-280 VAC / 6A |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) |
| Lighting | N/A |
| Laser Line | 3 Laser Red Line |
| CCTV | N/A |
| Weight | 2000 Kg |

Absorber

| | |
|------------------------------|---|
| Material | Expandable Polypropylene |
| Power Density Susceptibility | 750 V/m |
| Operating Temperature | -15 C to +60 C |
| Operating Humidity | 30% to 70% |
| ISO Dust-Free (Class) | Suited for Class 100,000 Clean Room |
| RoHS & REACH | RoHS & REACH Compliant |
| Fire-retardant Performance | NRL 8093 Test 1&3 / UL94 HBF / ISO 4589-2 |
| Waterproof Rating | IPX5 |

Communication Antenna

| | |
|------------------------|-----------------------|
| Operating Frequency | 0.65-8GHz |
| Antenna Gain | 6 dBi |
| Polarization | Single Polarization |
| Polarization Direction | Circular Polarization |
| Max. Watt | 4 Watt CW |
| Connector | SMA |

SISO Switching Box

| | |
|--------------------------|---|
| Passive DRE | 0.5 - 13 GHz with DRE |
| Wi-Fi / BT DRE Frequency | 0.5 - 8 GHz (Optional) |
| 5GNR FR1 DRE Frequency | 0.5 - 8 GHz (Optional) |
| Instrument Port Support | 3 Port |
| Test Item Support | Passive Cellular Tx / Rx (Optional) BT / Wi-Fi Tx / Rx (Optional) Communication Coexistence (Optional) Carrier Aggregation (Optional) |

Measurement Antenna

| | |
|------------------------|----------------------------------|
| Operating Frequency | 0.65 - 8.5 GHz |
| Polarization | Dual Linear Polarization Antenna |
| Polarization Isolation | 20dB |
| Antenna Gain | 10 dBi |
| Connector | SMA |

Positioner

| | |
|-------------------------|---|
| Theta Platform Diameter | 0.8m |
| Turntable PHI Load | 8.0Kg |
| Torque | Theta 9 N-m ,Phi 3 N-m |
| Turntable Type | 3D |
| Turntable Resolution | 0.1° |
| Turntable Accuracy | ±0.5° |
| Max. Turntable Speed | Theta 6 RPM ,Phi 12 RPM |
| Input Power | 220 VAC 50GHZ 500W |
| Phi Axis Removable | N/A |
| Standard Fixture | Flat Plate Fixture |
| Optional Fixture | Hands Fixture / Handheld Device Fixture / Laptop Fixture SPEAG SAM Head Phantom Fixture / Customized Fixture |

Installation Requirement

| | |
|----------------------------------|-------------------|
| Working Dimension(L/W/H) | 3.7 x 3.2 x 2.5 m |
| Electrical | 220VAC 50Hz 32A |
| Regular Lead Time (Working Days) | 60 |
| Temporary Storage Spacing | 12 x 12m |

Control Unit

| | | | |
|------------------|------------------------------|------------------------------|------------------------------|
| CPU | Intel Core i5 | Intel Core i9 | Intel Core i9 |
| Operating System | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit |
| Hard Drive | 1TB HDD | 256GB M.2 | 256GB M.2 |
| Ram | 16GB | 16GB | 16GB |
| Monitor | 24" | 24" | 24" |
| I/O Interface | GPIB | GPIB | N/A |
| Instrument Rack | 19"41U | 19"41U | 19"25U |

A3 X Upgrade

| MIMO System | A3 |
|--------------------------------|---|
| Measurement Distance | > 1.0m |
| Operating Frequency | 2 - 18GHz |
| Number of Antennas | 3 Antennas |
| Antenna Array Configuration | Directional |
| Antenna Installation | Plug - In |
| Antenna Horizontal Spacing | +/- 67.5 ° |
| Antenna Vertical Spacing | N/A |
| Communication Channel | 3T3R |
| Test Function | Maximum Throughput Test / Range Versus Rate Test Spatial Consistency Test / AP Coexistence Test Stability / TR-398 Compliance |
| System Stability | Data Throughput SD < 10% in Average |
| Insertion Attenuation | 0-110dB , step 1dB |
| Path Loss (Include Attenuator) | 53dB @ 2.4GHz ; 60dB @ 6GHz |
| Supported Software | IPerf3 / IxChariot |

A3

Shielding Box

| | | |
|---------------------------|---|-------------------|
| Outside Dimension (L/W/H) | 0.7 x 0.9 x 1.2 m | 0.7 x 0.9 x 1.8 m |
| Chambers | 2 Chambers | 3 Chambers |
| Shielding Door(W/H) | 0.6 x 0.4 m | |
| Shielding Effectiveness | 2.0 GHz - 8.0 GHz > 100dB | |
| Air Vent | Honeycomb, 0.1 x 0.1m | |
| Access Panel | 0.3 x 0.3 m | |
| Power Source Filter | 1P2W 100 - 280 VAC / 6A | |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) | |

Programmable Attenuator

| | | | |
|---------------------|---------------|---|----|
| Operating Frequency | DC - 18 GHz | | |
| Channels | 4 | 8 | 16 |
| Attenuation Range | 0 - 121 dB | | |
| Attenuation Step | 1 dB | | |
| Insertion Loss | 2.5dB at 6GHz | | |
| Connector | SMA | | |

A6 X Standard

A6 offers more measurement possibilities to customers, while maintaining the balance between measurement speed, measurement frequencies, and measurement accuracy.

A white rounded rectangular box containing the text 'A6' in blue. The box is positioned on the right side of the page, partially overlapping a white curved line that extends from the top right corner towards the center.

A6




A6 X Appearance

- CTIA Complaint
- Flixible Upgrade Path
- Optimal Measurement



A6 X Three-view drawing

- Size: L6.0 x W3.0 x H3.0 m
- Weight: 4,000 kg
- Built space: L6.2 x W4.3 x H3.3 m
- Floor-loading capacity: 250kg/m²

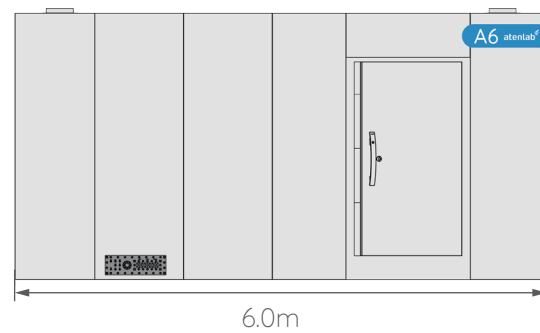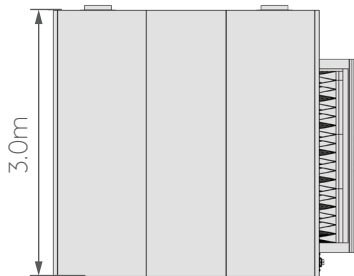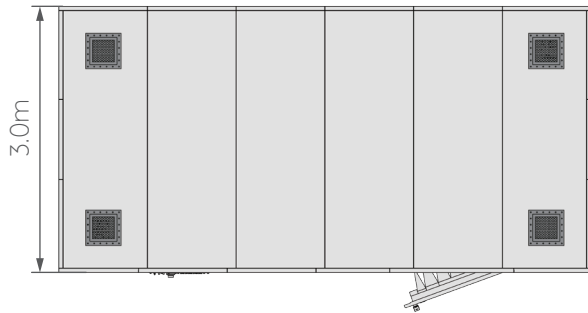

A6

A6 X Internal



A6 X Specifications

| SISO System | A6 |
|----------------------------|--|
| Measurement Distance | 4.0m |
| Maximum Tested Object | 19" Laptop |
| Quiet Zone Size | 0.5m |
| Quiet Zone Characteristics | SD < 0.8 |
| Operating Frequency | 0.65 - 8.5 GHz |
| Antenna Framework | Direct Far-field |
| Number of Antennas | Single Probe |
| Passive Test Time | Ant. Eff. < 4min |
| TRP Test Time | TRP < 6 min / Ch. |
| TIS Test Time | TIS < 10 min / Ch. |
| Test Function | Antenna Performance / Receiver Sensitivity / Transmit Power Communication Coexistence / Carrier Aggregation |
| Test Item | EIRP / EIS / TRP / TIS / Ant. Eff. / Antenna Pattern / Gain |
| Communication Protocol | 5G NR FR1 / LTE TDD / FDD / LTE Cat-M / NB-IoT / Bluetooth Wi-Fi 802.11a / b / g / n / ac / ax / be WCDMA / HSDPA / HSPA / HSPA+ / HSUPA TD-SCDMA / TD-HSDPA / GSM / GPRS / EDGE CDMA2000 / CDMA 1xRTT / CDMA 1xEVDO |
| System Stability | Ant. Eff. SD < 10% TRP SD < 0.5dBm ; TIS SD < 1dBm |
| Path Loss (Typical) | 55dB @ 3.8GHz 42dB @ 6.0GHz ,48dB @ 8.0GHz |

A6

A6 X Hardware Specifications

| Anechoic Chamber | A6 |
|---------------------------------|---|
| Outside Dimension (L/W/H) | 6.0 x 3.0 x 3.0 m |
| Inside Dimension (L/W/H) | 5.9 x 2.9 x 2.9 m |
| Shielding Effectiveness | 0.03-18GHz > 100dB |
| Shielding Steel Sheet Thickness | SPCC Steel Pan Type By 2 mm Galvanized Steel Sheet |
| Shielding Door | Electric Auto Latching |
| Shielding Door Dimension (W/H) | 1.0 x 2.0 m |
| Number of Shielding Door | 1 |
| Air Vent | Honeycomb, 0.3 x 0.3 m |
| Power Source Filter | 1P2W 100-280 VAC / 16A |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) |
| Lighting | LED |
| Laser Line | 3 Laser Red Line |
| CCTV | 2560 x 1440 @ 30fps PTZ Joystick Controller (Optional) |
| Weight | 4000 Kg |

Absorber

| | |
|------------------------------------|---|
| Material | Expandable Polypropylene |
| Power Density Susceptibility (V/m) | 750 V/m |
| Operating Temperature | -15 C to +60 C |
| Operating Humidity | 30% to 70% |
| ISO Dust-Free (Class) | Suited for Class 100,000 Clean Room |
| RoHS & REACH | RoHS & REACH Compliant |
| Fire-retardant Performance | NRL 8093 Test 1&3 / UL94 HBF / ISO 4589-2 |
| Waterproof Rating | IPX5 |

Communication Antenna

| | |
|------------------------|-----------------------|
| Operating Frequency | 0.65 - 8GHz |
| Antenna Gain | 6 dBi |
| Polarization | Single Polarization |
| Polarization Direction | Circular Polarization |
| Max. Watt | 4 Watt CW |
| Connector | SMA |

SISO Switching Box

| | |
|--------------------------|---|
| Passive DRE | 0.5 - 13 GHz with DRE |
| Wi-Fi / BT DRE Frequency | 0.5 - 8 GHz (Optional) |
| 5GNR FR1 DRE Frequency | 0.5 - 8 GHz (Optional) |
| Instrument Port Support | 3 Port |
| Test Item Support | Passive Cellular Tx / Rx (Optional) BT / Wi-Fi Tx / Rx (Optional) Communication Coexistence (Optional) Carrier Aggregation (Optional) |

Measurement Antenna

| | |
|------------------------|----------------------------------|
| Operating Frequency | 0.65 - 8.5 GHz |
| Polarization | Dual Linear Polarization Antenna |
| Polarization Isolation | 20dB |
| Antenna Gain | 10 dBi |
| Connector | SMA |

| Positioner | |
|----------------------------------|--|
| Theta Platform Diameter | 1.2m |
| Turntable PHI Load | 15Kg |
| Torque | Theta 90 N-m ,Phi 8 N-m |
| Turntable Type | 3D |
| Turntable Resolution | 0.1° |
| Turntable Accuracy | ±0.5° |
| Max. Turntable Speed | Theta 7 RPM ,Phi 20 RPM |
| Input Power | 220 VAC 50GHz 1000W |
| Phi Axis Removable | PHI Axis Movable and Removable |
| Standard Fixture | Flat Plate Fixture |
| Optional Fixture | Hands Fixture / Handheld Device Fixture / Laptop Fixture SPEAG SAM Head Phantom Fixture / 2D Styrofoam / Customized Fixture |
| Installation Requirement | |
| Working Dimension(L/W/H) | 6.2 x 4.3 x 3.3 m |
| Electrical | 220VAC 50Hz 32A |
| Regular Lead Time (Working Days) | 60 |
| Temporary Storage Spacing | 27 x 27m |

Control Unit

| | | | |
|------------------|------------------------------|------------------------------|------------------------------|
| CPU | Intel Core i5 | Intel Core i9 | Intel Core i9 |
| Operating System | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit |
| Hard Drive | 1TB HDD | 256GB M.2 | 256GB M.2 |
| Ram | 16GB | 16GB | 16GB |
| Monitor | 24" | 24" | 24" |
| I/O Interface | GPIB | GPIB | N/A |
| Instrument Rack | 19"41U | 19"41U | 19"25U |

A6 X Upgrade

| MIMO System | A6 |
|--------------------------------|---|
| Measurement Distance | > 2.0m |
| Operating Frequency | 2-18GHz |
| Number of Antennas | 8 Antennas |
| Antenna Array Configuration | Directional |
| Antenna Installation | Plug - In |
| Antenna Horizontal Spacing | +/- 67.5 ° |
| Antenna Vertical Spacing | +/- 22.5 ° |
| Communication Channel | 8T8R |
| Test Function | Maximum Throughput Test / Range Versus Rate Test Spatial Consistency Test / AP Coexistence Test Stability / TR-398 Compliance |
| System Stability | Data Throughput SD < 10% in Average |
| Insertion Attenuation | 0-110dB , step 1dB |
| Path Loss (Include Attenuator) | 60dB @ 2.4GHz ; 67dB @ 6GHz |
| Supported Software | IPerf3 / IxChariot |

A6

Shielding Box

| | | |
|---------------------------|---|-------------------|
| Outside Dimension (L/W/H) | 0.7 x 0.9 x 1.2 m | 0.7 x 0.9 x 1.8 m |
| Chambers | 2 Chambers | 3 Chambers |
| Shielding Door(W/H) | 0.6 x 0.4 m | |
| Shielding Effectiveness | 2.0 GHz - 8.0 GHz > 100dB | |
| Air Vent | Honeycomb, 0.1 x 0.1m | |
| Access Panel | 0.3 x 0.3 m | |
| Power Source Filter | 1P2W 100 - 280 VAC / 6A | |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) | |

Programmable Attenuator

| | | | |
|---------------------|---------------|---|----|
| Operating Frequency | DC - 18 GHz | | |
| Channels | 4 | 8 | 16 |
| Attenuation Range | 0 - 121 dB | | |
| Attenuation Step | 1 dB | | |
| Insertion Loss | 2.5dB at 6GHz | | |
| Connector | SMA | | |

A8 x Pro

Best quiet zone performance, comply to both software and hardware requirement specified under CTIA standards.
Realistic measurement, obtaining from the 5.0m measurement distance and large space.

A8




A8 X Appearance

- Highest Precision
- CTIA Certification
- Widest Operating Frequency




A8 X Three-view drawing

- Size: L8.2 x W4.1 x H4.1 m
- Weight: 6,500 kg
- Built space: L8.4 x W5.4 x H4.4 m
- Floor-loading capacity: 250kg/m²

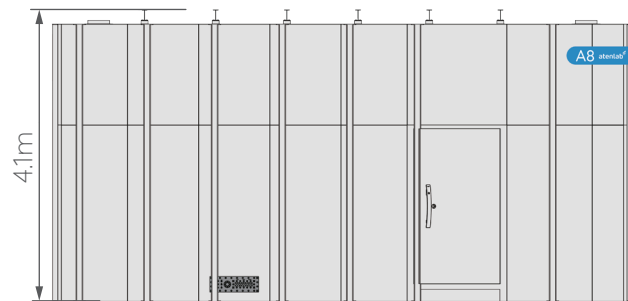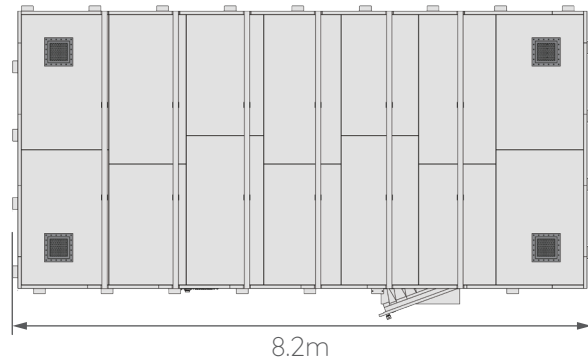

A8

A8 X Internal

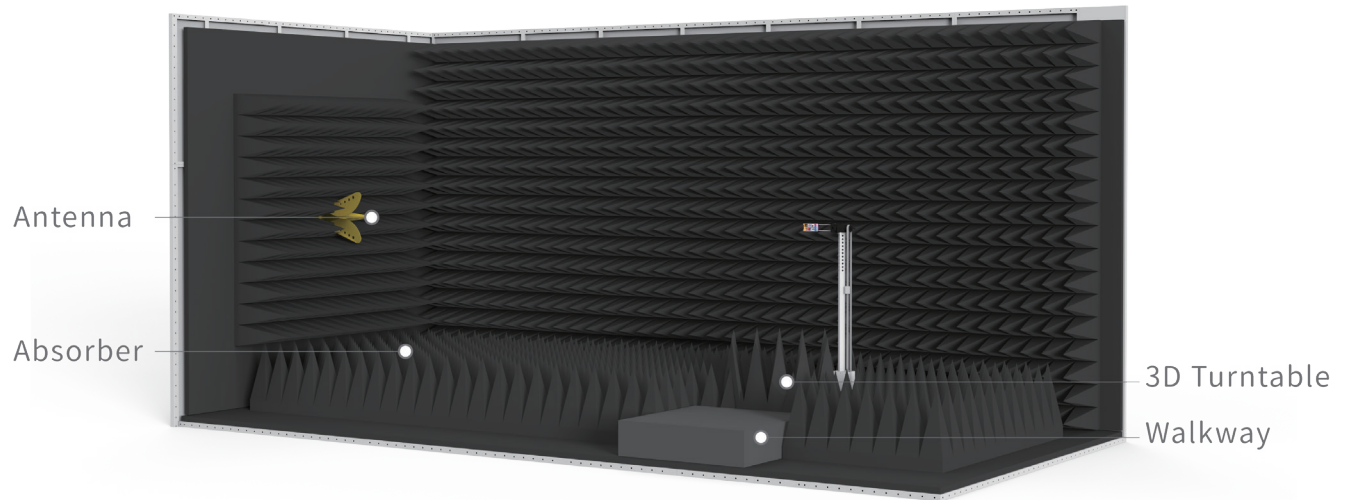

A8 X Specification

| SISO System | A8 |
|----------------------------|---|
| Measurement Distance | 5.0m |
| Maximum Tested Object | 19" Laptop |
| Quiet Zone Size | 0.6m |
| Quiet Zone Characteristics | SD < 0.8 |
| Operating Frequency | 0.45 - 6 GHz |
| Antenna Framework | Direcet Far-field |
| Number of Antennas | Single Probe |
| Passive Test Time | Ant. Eff. < 4min |
| TRP Test Time | TRP < 6 min / Ch. |
| TIS Test Time | TIS < 10 min / Ch. |
| Test Function | Antenna Performance / Receiver Sensitivity / Transmit Power Communication Coexistence / Carrier Aggregation |
| Test Item | EIRP / EIS / TRP / TIS / Ant. Eff. / Antenna Pattern / Gain |
| Communication Protocol | 5GNR FR1 / LTE TDD / FDD / LTE Cat-M / NB-IoT / Bluetooth Wi-Fi 802.11a / b / g / n / ac / ax / be WCDMA / HSDPA / HSPA / HSPA+ / HSUPA TD-SCDMA / TD-HSDPA / GSM / GPRS / EDGE CDMA2000 / CDMA 1xRTT / CDMA 1xEVDO |
| System Stability | Ant. Eff. SD < 10% TRP SD < 0.5dBm ; TIS SD < 1dBm |
| Path Loss (Typical) | 57dB @ 3.8GHz 45dB @ 6.0GHz ,51dB @ 8.0GHz |

A8

A8 X Hardware Specifications

| Anechoic Chamber | A8 |
|---------------------------------|---|
| Outside Dimension (L/W/H) | 8.2 x 4.1 x 4.1 m |
| Inside Dimension (L/W/H) | 7.9 x 3.8 x 3.8 m |
| Shielding Effectiveness | 0.03-18GHz > 100dB |
| Shielding Steel Sheet Thickness | SPCC Steel Pan Type By 2 mm Galvanized Steel Sheet |
| Shielding Door | Electric Auto Latching |
| Shielding Door Dimension (W/H) | 1.0 x 2.0 m |
| Number of Shielding Door | 1 |
| Air Vent | Honeycomb 0.3 x 0.3 m |
| Power Source Filter | 1P2W 100-280 VAC / 16A |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) |
| Lighting | LED |
| Laser Line | 3 Laser Red Line |
| CCTV | 2560 x 1440 @ 30fps PTZ Joystick Controller (Optional) |
| Weight | 6500 Kg |

Absorber

| | |
|------------------------------|---|
| Material | Expandable Polypropylene |
| Power Density Susceptibility | 750 V/m |
| Operating Temperature | -15 C to +60 C |
| Operating Humidity | 30% to 70% |
| ISO Dust-Free (Class) | Suited for Class 100,000 Clean Room |
| RoHS & REACH | RoHS & REACH Compliant |
| Fire-retardant Performance | NRL 8093 Test 1&3 / UL94 HBF / ISO 4589-2 |
| Waterproof Rating | IPX5 |

Communication Antenna

| | |
|------------------------|-----------------------|
| Operating Frequency | 0.45 - 8GHz |
| Antenna Gain | 4 dBi |
| Polarization | Single Polarization |
| Polarization Direction | Circular Polarization |
| Max. Watt | 4 Watt CW |
| Connector | SMA |

SISO Switching Box

| | |
|--------------------------|---|
| Passive DRE | 0.45 - 13 GHz with DRE |
| Wi-Fi / BT DRE Frequency | 0.45 - 8 GHz (Optional) |
| 5GNR FR1 DRE Frequency | 0.45 - 8 GHz (Optional) |
| Instrument Port Support | 3 Port |
| Test Item Support | Passive Cellular Tx / Rx (Optional) BT / Wi-Fi Tx / Rx (Optional) Communication Coexistence (Optional) Carrier Aggregation (Optional) |

Measurement Antenna

| | |
|------------------------|----------------------------------|
| Operating Frequency | 0.45 - 6.0 GHz |
| Polarization | Dual Linear Polarization Antenna |
| Polarization Isolation | 20dB |
| Antenna Gain | 8 dBi |
| Connector | SMA |

Positioner

| | |
|-------------------------|--|
| Theta Platform Diameter | 1.2m |
| Turntable PHI Load | 15Kg |
| Torque | Theta 90 N-m ,Phi 8 N-m |
| Turntable Type | 3D |
| Turntable Resolution | 0.1° |
| Turntable Accuracy | ±0.5° |
| Max. Turntable Speed | Theta 7 RPM ,Phi 20 RPM |
| Input Power | 220 VAC 50GHz 1000W |
| Phi Axis Removable | PHi Axis Movable and Removable |
| Standard Fixture | Flat Plate Fixture |
| Optional Fixture | Hands Fixture / Handheld Device Fixture / Laptop Fixture SPEAG SAM Head Phantom Fixture / 2D Styrofoam / Customized Fixture |

Installation Requirement

| | |
|----------------------------------|-------------------|
| Working Dimension(L/W/H) | 8.4 x 5.4 x 4.4 m |
| Electrical | 220VAC 50Hz 32A |
| Regular Lead Time (Working Days) | 60 |
| Temporary Storage Spacing | 48 x 48m |

Control Unit

| | | | |
|------------------|------------------------------|------------------------------|------------------------------|
| CPU | Intel Core i5 | Intel Core i9 | Intel Core i9 |
| Operating System | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit | Windows 10 Enterprise 64 bit |
| Hard Drive | 1TB HDD | 256GB M.2 | 256GB M.2 |
| Ram | 16GB | 16GB | 16GB |
| Monitor | 24" | 24" | 24" |
| I/O Interface | GPIB | GPIB | N/A |
| Instrument Rack | 19"41U | 19"41U | 19"25U |

A6 X Upgrade

| MIMO System | A8 |
|--------------------------------|---|
| Measurement Distance | > 2.0m |
| Operating Frequency | 2-18GHz |
| Number of Antennas | 16 Antennas |
| Antenna Array Configuration | Directional |
| Antenna Installation | Plug - In |
| Antenna Horizontal Spacing | +/- 67.5 ° |
| Antenna Vertical Spacing | +/- 22.5 ° |
| Communication Channel | 16T16R |
| Test Function | Maximum Throughput Test / Range Versus Rate Test Spatial Consistency Test / AP Coexistence Test Stability / TR-398 Compliance |
| System Stability | Data Throughput SD < 10% in Average |
| Insertion Attenuation | 0-110dB , step 1dB |
| Path Loss (Include Attenuator) | 60dB @ 2.4GHz ; 67dB @ 6GHz |
| Supported Software | IPerf / IxChariot |

A8

Shielding Box

| | | |
|---------------------------|---|-------------------|
| Outside Dimension (L/W/H) | 0.7 x 0.9 x 1.2 m | 0.7 x 0.9 x 1.8 m |
| Chambers | 2 Chambers | 3 Chambers |
| Shielding Door(W/H) | 0.6 x 0.4 m | |
| Shielding Effectiveness | 2.0 GHz - 8.0 GHz > 100dB | |
| Air Vent | Honeycomb, 0.1 x 0.1m | |
| Access Panel | 0.3 x 0.3 m | |
| Power Source Filter | 1P2W 100 - 280 VAC / 6A | |
| Signal Filter | USB 3.0 / RS-232 / RS-485 / RJ-45 1Gbps / RJ-45 10Gbps (Optional) | |

Programmable Attenuator

| | | | |
|---------------------|---------------|---|----|
| Operating Frequency | DC - 18 GHz | | |
| Channels | 4 | 8 | 16 |
| Attenuation Range | 0 - 121 dB | | |
| Attenuation Step | 1 dB | | |
| Insertion Loss | 2.5dB at 6GHz | | |
| Connector | SMA | | |



Appendix

Everything you need is already here for you to utilize.

Appendix/ 2G Band List Guide

GSM band scope (3GPP TS 45.005 OCW= 200 kHz or others)

| Band System | Uplink(MHz) | | OBW (MHz) | Downlink(MHz) | | Related LTE Band |
|-------------|-------------|-------------------|--------------|---------------|-------------------|---------------------|
| | Flow | F _{high} | | Flow | F _{high} | |
| 380 T-GSM | 380.2 | 389.8 | 9.6 | 390.2 | 399.8 | |
| 410 T-GSM | 410.2 | 419.8 | 9.6 | 420.2 | 429.8 | |
| 450 GSM | 450.6 | 457.4 | 6.8 | 460.6 | 467.6 | 31 |
| 480 GSM | 479 | 485.8 | 6.8 | 489 | 496 | |
| 710 GSM | 698.2 | 716.2 | 18 | 728.2 | 746.2 | 12 |
| 750 GSM | 777.2 | 793.2 | 16 | 777.2 | 792.2 | |
| 810 T-GSM | 806.2 | 821.2 | 15 | 851.2 | 866.2 | 27 |
| 850 GSM | 824.2 | 848.8 | 24.6 | 869.2 | 894.2 | 5 |
| 900 P-GSM | 890.2 | 914.8 | 24.6 | 935 | 960 | |
| 900 E-GSM | 880.2 | 914.8 | 34.6 | 925 | 960 | 8 |
| 900 R-GSM | 876.2 | 914.8 | 38.6 | 921 | 960 | |
| 900 T-GSM | 870.4 | 876 | 5.6 | 915.4 | 921 | |
| 1800 DCS | 1710.2 | 1784.8 | 74.6 | 1805.2 | 1879.8 | 3 |
| 1900 PCS | 1850.2 | 1909.8 | 59.6 | 1930.2 | 1989.8 | 2 |

Appendix/ 3G Band List Guide

UMTS FDD/TDD band scope (3GPP TS 25.101 OCW=5 MHz)

| FDD Band # | Name | Uplink | | Downlink | | OBW (MHz) |
|------------|-------------|------------------------|-------------------------|------------------------|-------------------------|-----------|
| | | F _{low} (MHz) | F _{high} (MHz) | F _{low} (MHz) | F _{high} (MHz) | |
| 1 | 2100 IMT | 1920 | 1980 | 2110 | 2170 | 60 |
| 2 | 1900 PCS | 1850 | 1910 | 1930 | 1990 | 60 |
| 3 | 1800 DCS | 1710 | 1785 | 1805 | 1880 | 75 |
| 4 | 1700 AWS | 1710 | 1755 | 2110 | 2155 | 45 |
| 5 | 850 CLR | 824 | 848.9 | 869 | 893.9 | 25 |
| 6 | No name | 830 | 839.9 | 875 | 884.9 | 10 |
| 7 | 2600 IMT-E | 2500 | 2570 | 2620 | 2690 | 70 |
| 8 | 900 E-GSM | 880 | 915 | 925 | 960 | 35 |
| 9 | No name | 1749.9 | 1784.9 | 1844.9 | 1879.9 | 35 |
| 10 | 900 E-AWS | 1710 | 1770 | 2110 | 2170 | 60 |
| 11 | 1500 LPDC | 1427.9 | 1447.9 | 1475.9 | 1495.9 | 20 |
| 12 | 700 LSMH | 699 | 716 | 729 | 746 | 25 |
| 13 | 700 USMH-C | 777 | 787 | 746 | 756 | 10 |
| 14 | 700 USMH-D | 788 | 798 | 758 | 768 | 10 |
| 19 | No name | 830 | 845 | 875 | 890 | 15 |
| 20 | 800 EUDD | 832 | 862 | 791 | 821 | 30 |
| 21 | 1500 UPDC | 1447.9 | 1462.9 | 1495.9 | 1510.9 | 15 |
| 22 | No name | 3410 | 3490 | 3510 | 3590 | 80 |
| 25 | 1900 EPCS | 1850 | 1915 | 1930 | 1995 | 65 |
| 26 | 850 ECLR | 814 | 849 | 859 | 894 | 35 |
| 32 | 1500 L-band | downlink only | | 1452 | 1496 | 44 |

Appendix/

4G-FDD Band List Guide

E-UTRA band scope (3GPP TS 36.101 R16)

| FDD Band # | Name | Uplink | | Downlink | | OBW (MHz) |
|------------|-------------|------------------------|-------------------------|------------------------|-------------------------|-----------|
| | | F _{low} (MHz) | F _{high} (MHz) | F _{low} (MHz) | F _{high} (MHz) | |
| 1 | 2100 | 1920 | 1980 | 2110 | 2170 | 60 |
| 2 | 1900 PCS | 1850 | 1910 | 1930 | 1990 | 60 |
| 3 | 1800+ | 1710 | 1785 | 1805 | 1880 | 75 |
| 4 | AWS-1 | 1710 | 1755 | 2110 | 2155 | 45 |
| 5 | 850 | 824 | 849 | 869 | 894 | 25 |
| 6 | No name | 830 | 839.9 | 875 | 884.9 | 25 |
| 7 | 2600 | 2500 | 2570 | 2620 | 2690 | 70 |
| 8 | 900 GSM | 880 | 915 | 925 | 960 | 35 |
| 9 | 1800 | 1749.9 | 1784.9 | 1844.9 | 1879.9 | 35 |
| 10 | AWS-1+ | 1710 | 1770 | 2110 | 2170 | 60 |
| 11 | 1500 Lower | 1427.9 | 1447.9 | 1475.9 | 1495.9 | 20 |
| 12 | 700 a | 699 | 716 | 729 | 746 | 17 |
| 13 | 700 c | 777 | 787 | 746 | 756 | 10 |
| 14 | 700 PS | 788 | 798 | 758 | 768 | 10 |
| 17 | 700 b | 704 | 716 | 734 | 746 | 12 |
| 18 | 800 Lower | 815 | 830 | 860 | 875 | 15 |
| 19 | 800 Upper | 830 | 845 | 875 | 890 | 15 |
| 20 | 800 DD | 832 | 862 | 791 | 821 | 30 |
| 21 | 1500 Upper | 1447.9 | 1462.9 | 1495.9 | 1510.9 | 15 |
| 22 | 3500 | 3410 | 3490 | 3510 | 3590 | 80 |
| 23 | No name | 2000 | 2019.9 | 2180 | 2199.9 | 20 |
| 24 | 1600 L-band | 1626.9 | 1660.9 | 1525 | 1559 | 34 |
| 25 | 1900+ | 1850 | 1915 | 1930 | 1995 | 65 |
| 26 | 850+ | 814 | 849 | 859 | 894 | 35 |

E-UTRA band scope (3GPP TS 36.101 R16)

| FDD Band # | Name | Uplink | | Downlink | | OBW (MHz) |
|------------|--------------|------------|-------------------------|------------|-------------------------|-----------|
| | | Flow (MHz) | F _{high} (MHz) | Flow (MHz) | F _{high} (MHz) | |
| 27 | 800 SMR | 807 | 824 | 852 | 869 | 17 |
| 28 | 700 APT | 703 | 748 | 758 | 803 | 45 |
| 29 | 700 d | - | - | 717 | 728 | 11 |
| 30 | 2300 WCS | 2305 | 2315 | 2350 | 2360 | 10 |
| 31 | 450 | 452.5 | 457.5 | 462.5 | 467.5 | 5 |
| 32 | 1500 L-band | - | - | 1452 | 1496 | 44 |
| 65 | 2100+ | 1920 | 2010 | 2110 | 2200 | 90 |
| 66 | AWS-3 | 1710 | 1780 | 2110 | 2180 | 70 |
| 67 | 700 EU | - | - | 738 | 758 | 20 |
| 68 | 700 ME | 698 | 728 | 753 | 783 | 30 |
| 69 | DL 2500 | - | - | 2570 | 2620 | 50 |
| 70 | AWS-4 | 1695 | 1710 | 1995 | 2010 | 15 |
| 71 | 600 | 663 | 698 | 617 | 652 | 35 |
| 72 | 450 PMR/PAMR | 451 | 456 | 461 | 466 | 5 |
| 73 | 450 APAC | 450 | 455 | 460 | 465 | 5 |
| 74 | L-band | 1427 | 1470 | 1475 | 1518 | 43 |
| 75 | DL 1500+ | - | - | 1432 | 1517 | 85 |
| 76 | DL 1500- | - | - | 1427 | 1432 | 5 |
| 85 | 700 a+ | 698 | 716 | 728 | 746 | 18 |
| 87 | 410 | 410 | 415 | 420 | 425 | 5 |
| 88 | 410+ | 412 | 417 | 422 | 427 | 5 |

Appendix/

4G-TDD Band List Guide

| E-UTRA band scope (3GPP TS 36.101 R16) | | | | |
|--|---------------|------------------------|-------------------------|----------|
| TDD Band # | Name | F _{low} (MHz) | F _{high} (MHz) | OBW(MHz) |
| 33 | TD 1900 | 1900 | 1920 | 20 |
| 34 | TD 2000 | 2010 | 2025 | 15 |
| 35 | TD PCS Lower | 1850 | 1910 | 60 |
| 36 | TD PCS Upper | 1930 | 1990 | 60 |
| 37 | TD PCS Center | 1910 | 1930 | 20 |
| 38 | TD 2600 | 2570 | 2620 | 50 |
| 39 | TD 1900+ | 1880 | 1920 | 40 |
| 40 | TD 2300 | 2300 | 2400 | 100 |
| 41 | TD 2600+ | 2496 | 2690 | 194 |
| 42 | TD 3500 | 3400 | 3600 | 200 |
| 43 | TD 3700 | 3600 | 3800 | 200 |
| 44 | TD 700 | 703 | 803 | 100 |
| 45 | TD 1500 | 1447 | 1467 | 20 |
| 46 | TD Unlicensed | 5150 | 5925 | 775 |
| 47 | TD V2X | 5855 | 5925 | 70 |
| 48 | TD 3600 | 3550 | 3700 | 150 |
| 49 | TD 3600r | 3550 | 3700 | 150 |
| 50 | TD 1500+ | 1432 | 1517 | 85 |
| 51 | TD 1500- | 1427 | 1432 | 5 |
| 52 | TD 3300 | 3300 | 3400 | 100 |
| 52 | | 2483.5 | 2495 | 11.5 |

Appendix/

5G-FR1 FDD Band List Guide

5G NR (3GPP TS 38.101)

| FR1 FDD Band # | Name | Uplink | | Downlink | | OBW (MHz) |
|-------------------|-----------------------|------------------------|-------------------------|------------------------|-------------------------|--------------|
| | | F _{low} (MHz) | F _{high} (MHz) | F _{low} (MHz) | F _{high} (MHz) | |
| n1 | IMT | 1920 | 1980 | 2110 | 2170 | 60 |
| n2 | PCS | 1850 | 1910 | 1930 | 1990 | 60 |
| n3 | DCS | 1710 | 1785 | 1805 | 1880 | 75 |
| n5 | CLR | 824 | 849 | 869 | 894 | 25 |
| n7 | IMT-E | 2500 | 2570 | 2620 | 2690 | 70 |
| n8 | Extended GSM | 880 | 915 | 925 | 960 | 35 |
| n12 | Lower SMH | 699 | 716 | 729 | 746 | 17 |
| n14 | | 788 | 798 | 758 | 768 | 10 |
| n18 | | 815 | 830 | 860 | 875 | 15 |
| n20 | Digital Dividend (EU) | 832 | 862 | 791 | 821 | 30 |
| n25 | Extended PCS | 1850 | 1915 | 1930 | 1995 | 65 |
| n26 | | 814 | 849 | 859 | 894 | 35 |
| n28 | APT | 703 | 748 | 758 | 803 | 45 |
| n30 | | 2305 | 2315 | 2350 | 2360 | 10 |
| n65 | | 1920 | 2010 | 2110 | 2200 | 90 |
| n66 | Extended AWS | 1710 | 1780 | 2110 | 2200 | 70 |
| n70 | AWS-4 | 1695 | 1710 | 1995 | 2020 | 15 |
| n71 | Digital Dividend (US) | 663 | 698 | 617 | 652 | 35 |
| n74 | Lower L-Band(US) | 1427 | 1470 | 1475 | 1518 | 43 |

5G NR (3GPP TS 38.101)

| FR1 FDD Band # | Name | Uplink | | Downlink | | OBW (MHz) |
|-------------------|------|------------------------|-------------------------|------------------------|-------------------------|--------------|
| | | F _{low} (MHz) | F _{high} (MHz) | F _{low} (MHz) | F _{high} (MHz) | |
| n85 | | 698 | 716 | 728 | 746 | 18 |
| n91 | | 832 | 862 | 1427 | 1432 | 30 |
| n92 | | 832 | 862 | 1432 | 1517 | 30 |
| n93 | | 880 | 915 | 1427 | 1432 | 35 |
| n94 | | 880 | 915 | 1432 | 1517 | 35 |

Appendix/

5G-FR1 TDD Band List Guide

| 5G NR (3GPP TS 38.101) | | | | |
|------------------------|---------------------|------------------------|-------------------------|----------|
| FR1 TDD Band # | Name | F _{low} (MHz) | F _{high} (MHz) | OBW(MHz) |
| n34 | IMT | 2010 | 2025 | 15 |
| n38 | IMT-E | 2570 | 2620 | 50 |
| n39 | DCS-IMT Gap | 1880 | 1920 | 40 |
| n40 | S-Band | 2300 | 2400 | 100 |
| n41 | BRS | 2496 | 2690 | 194 |
| n46 | | 5150 | 5925 | 775 |
| n47 | | 5855 | 5925 | 70 |
| n48 | | 3550 | 3700 | 150 |
| n50 | L-Band (EU) | 1432 | 1517 | 85 |
| n51 | Extended L-Band(EU) | 1427 | 1432 | 5 |
| n53 | | 2483.5 | 2495 | 11.5 |

5G NR (3GPP TS 38.101)

| FR1 TDD Band # | Name | F _{low} (MHz) | F _{high} (MHz) | OBW(MHz) |
|----------------|--------|------------------------|-------------------------|----------|
| n77 | C-Band | 3300 | 4200 | 900 |
| n78 | C-Band | 3300 | 3800 | 500 |
| n79 | C-Band | 4400 | 5000 | 600 |
| n90 | | 2496 | 2690 | 194 |
| n96 | | 5925 | 7125 | 1200 |

atenlab 



www.atenlab.com.tw